

# KTW OSCILLATION MOTOR REPLACE

Step By Step Guide with Images



## Installation Guide

Please note that the Oscillation Motor is best replaced while the Fan is removed from the wall mount.

### Step 1.

Remove the Oscillation Button from the Fan using a Phillips head screwdriver; the screw you need to remove has a reverse thread.

### Step 2.


Remove the Fan Controller Holder Screw and put it to the side with the other hardware that is being removed.

### Step 3.

Remove the Motor Cover, and put this aside with the other hardware that is being removed.

### Step 4.

Remove the Oscillation Control Arm with a Phillips head screwdriver; the screw you need to remove has a reverse thread.

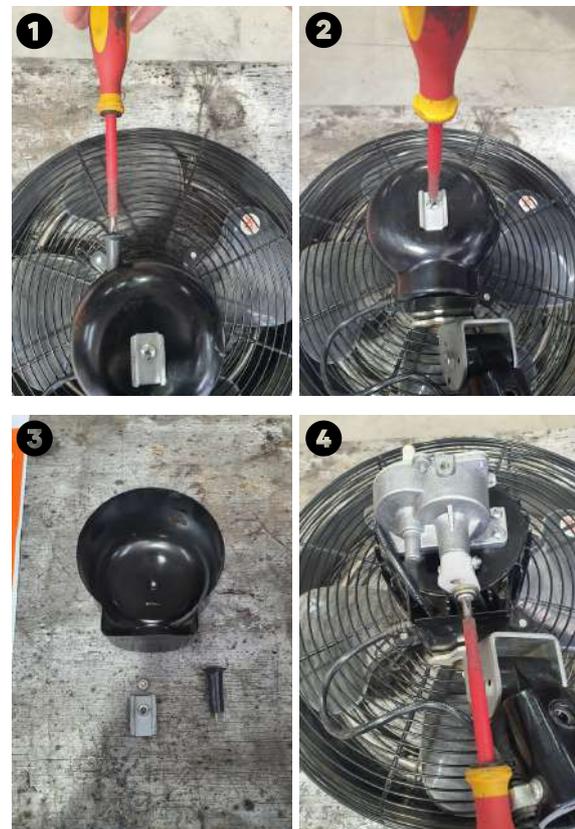

# KTW OSCILLATION MOTOR REPLACE

## Step By Step Guide with Images



## Installation Guide Continued

### Step 5.

Remove the Cable Clamp and screw with a Phillips head screwdriver and put this screw to the side with the other hardware.

### Step 6.

Remove the three bolts that hold the Oscillation Motor to the Fan. Put these three bolts to the side with the other hardware.

### Step 7.

With the three bolts removed, you can now pull up on the Oscillation motor and remove it from the Fan.

### Step 8.

With the Motor removed make sure there is no visual damage to the shaft coming out of the Fan. Follow this guide in reverse to reinstall the New Oscillation Motor.

